

GLANCE-LED

HOW TO:

Set up your **GLANCE** in under 2 minutes with no coding required.



LET'S GET STARTED



GLANCE-LED

PLUG IN

Plug in your GLANCE and this message will appear on screen.

STEP ONE




1



GLANCE-LED

CONNECT

Connect your GLANCE to the unit's wi-fi. It will appear as '**GLANCE-LED**'. The password is '**tothemoon**'.

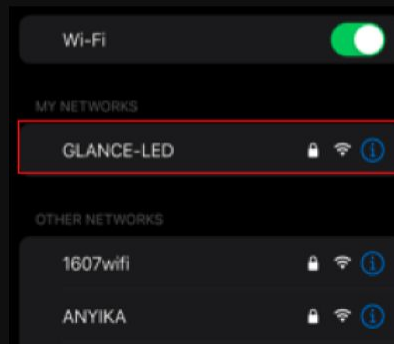

STEP TWO



2

GLANCE-LED

CONFIGURE

Go ahead and complete connection by connecting to your local wi-fi on the next screen.

STEP THREE

A white rectangular box containing a configuration form. At the top, the label "SSID" is followed by a text input field containing "ATT4FU5TrR". Below that, the label "Password" is followed by a text input field containing seven asterisks. At the bottom of the form are two blue buttons: "Save" and "Refresh".

GLANCE-LED

MAC ADDRESS

The MAC address will display after successful connection. It is also located on the back of your GLANCE unit.



STEP FOUR



4

GLANCE-LED

CHOOSE ASSETS



Go to passiveincomeconsultingllc.com/glance.php (or scan QR code) and enter your unit's MAC address. Then, use the drop down menu to choose your ten assets.

STEP FIVE



GLANCE-LED

+ MORE INFO

**All REITS, mutual funds, index funds, and precious metals can be found under the STOCK drop down menu. Ex: choose the stock drop-down and type in 'precious metals' for them to appear.

STEP FIVE.5



5.5

GLANCE-LED

SHOW US



We love seeing your GLANCE's in action. Post a pic and email it to us at admin@glance-led.com to **receive \$15** in through PayPal!



HAVE FUN

